

Strictly Confidential: (For Internal and Restricted use only)
Senior School Certificate Examination-2020
Marking Scheme – PHYSICS THEORY (042)
(55/2/3)

General Instructions: -

1. You are aware that evaluation is the most important process in the actual and correct assessment of the candidates. A small mistake in evaluation may lead to serious problems which may affect the future of the candidates, education system and teaching profession. To avoid mistakes, it is requested that before starting evaluation, you must read and understand the spot evaluation guidelines carefully. **Evaluation is a 10-12 days mission for all of us. Hence, it is necessary that you put in your best efforts in this process.**
2. Evaluation is to be done as per instructions provided in the Marking Scheme. It should not be done according to one's own interpretation or any other consideration. Marking Scheme should be strictly adhered to and religiously followed. **However, while evaluating, answers which are based on latest information or knowledge and/or are innovative, they may be assessed for their correctness otherwise and marks be awarded to them.**
3. The Head-Examiner must go through the first five answer books evaluated by each evaluator on the first day, to ensure that evaluation has been carried out as per the instructions given in the Marking Scheme. The remaining answer books meant for evaluation shall be given only after ensuring that there is no significant variation in the marking of individual evaluators.
4. Evaluators will mark(✓) wherever answer is correct. For wrong answer 'X' be marked. Evaluators will not put right kind of mark while evaluating which gives an impression that answer is correct and no marks are awarded. **This is most common mistake which evaluators are committing.**
5. If a question has parts, please award marks on the right-hand side for each part. Marks awarded for different parts of the question should then be totaled up and written in the left-hand margin and encircled. This may be followed strictly.
6. If a question does not have any parts, marks must be awarded in the left-hand margin and encircled. This may also be followed strictly.
7. If a student has attempted an extra question, answer of the question deserving more marks should be retained and the other answer scored out.
8. No marks to be deducted for the cumulative effect of an error. It should be penalized only once.
9. A full scale of marks **0-70** has to be used. Please do not hesitate to award full marks if the answer deserves it.
10. Every examiner has to necessarily do evaluation work for full working hours i.e. 8 hours every day and evaluate 20 answer books per day in main subjects and 25 answer books per day in other subjects (Details are given in Spot Guidelines).
11. Ensure that you do not make the following common types of errors committed by the Examiner in the past:-
 - Leaving answer or part thereof unassessed in an answer book.
 - Giving more marks for an answer than assigned to it.
 - Wrong totaling of marks awarded on a reply.
 - Wrong transfer of marks from the inside pages of the answer book to the title page.

- Wrong question wise totaling on the title page.
- Wrong totaling of marks of the two columns on the title page.
- Wrong grand total.
- Marks in words and figures not tallying.
- Wrong transfer of marks from the answer book to online award list.
- Answers marked as correct, but marks not awarded. (Ensure that the right tick mark is correctly and clearly indicated. It should merely be a line. Same is with the X for incorrect answer.)
- Half or a part of answer marked correct and the rest as wrong, but no marks awarded.

12. While evaluating the answer books if the answer is found to be totally incorrect, it should be marked as cross (X) and awarded zero (0) Marks.

13. Any unassessed portion, non-carrying over of marks to the title page, or totaling error detected by the candidate shall damage the prestige of all the personnel engaged in the evaluation work as also of the Board. Hence, in order to uphold the prestige of all concerned, it is again reiterated that the instructions be followed meticulously and judiciously.


14. The Examiners should acquaint themselves with the guidelines given in the Guidelines for spot Evaluation before starting the actual evaluation.


15. Every Examiner shall also ensure that all the answers are evaluated, marks carried over to the title page, correctly totaled and written in figures and words.



16. The Board permits candidates to obtain photocopy of the Answer Book on request in an RTI application and also separately as a part of the re-evaluation process on payment of the processing charges.

MARKING SCHEME: PHYSICS

QUESTION PAPER CODE: 55/2/3

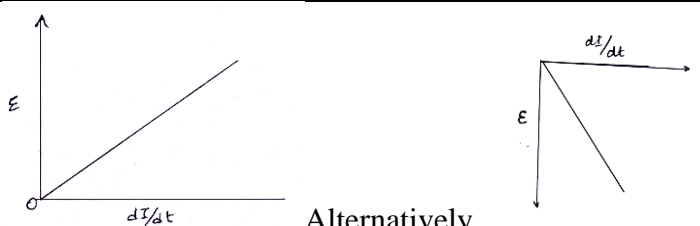Q.No.	Value Points/Expected Answer	Marks	Total Marks				
SECTION A							
1	(A) Free electron density in the conductor	1	1				
2	(B) Metals at low temperature	1	1				
3	(A) X – rays	1	1				
4	(A) Maximum when the conductor is perpendicular to the direction of the magnetic field	1	1				
5	(B) Magnetic field and electric field	1	1				
6	(A) neutron converts into a proton emitting antineutrino.	1	1				
7	(A) move in a straight line.	1	1				
8	(C) zero as diffusion and drift current are equal and opposite.	1	1				
9	(B) just below the conduction band	1	1				
10	(A) binding energy per nucleon increases	1	1				
11	V_0 / K	1	1				
12	Perpendicular	1	1				
13	Increased	1	1				
14	Third OR $\frac{2\lambda}{a}$ [Alternatively, broader]	1	1				
15	Least / minimum	1	1				
16	For a given photosensitive material, there exists a certain minimum cut-off frequency of the incident radiation, called the threshold frequency , below which no emission of photo electrons takes place, no matter how intense the incident light is.	1	1				
17	$\frac{1}{8} B\omega l^2$	1	1				
18	$X_c = \frac{1}{2\pi\nu C}$ OR $Z = R$	1	1				
19	$\sqrt{\frac{v - v_1}{v - v_2}}$	1	1				
20	 <p>Alternatively</p>	1	1				
SECTION B							
21	<table border="1" style="width: 100%;"> <tr> <td>Identification of waves (a) & (b)</td> <td>$\frac{1}{2} + \frac{1}{2}$</td> </tr> <tr> <td>Uses</td> <td>$\frac{1}{2} + \frac{1}{2}$</td> </tr> </table> <p>(a) minimum wavelength: γ rays (b) minimum frequency: Microwaves γ rays are used to treat cancer Microwaves are used for communication [or any other correct use]</p>	Identification of waves (a) & (b)	$\frac{1}{2} + \frac{1}{2}$	Uses	$\frac{1}{2} + \frac{1}{2}$	<p>$\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$</p>	2
Identification of waves (a) & (b)	$\frac{1}{2} + \frac{1}{2}$						
Uses	$\frac{1}{2} + \frac{1}{2}$						

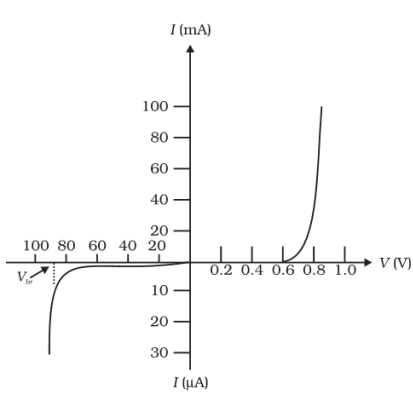22	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 70%;">Evaluation of radius of loop</td> <td style="width: 30%; text-align: right;">1 mark</td> </tr> <tr> <td>Evaluation of magnetic moment</td> <td style="text-align: right;">1 mark</td> </tr> </table> $B = \frac{\mu_0 i}{2r} \text{ or } r = \frac{\mu_0 i}{2B}$ $r = \frac{4\pi \times 5 \times 10^{-7}}{2\pi \times 10^{-3}} = 1 \times 10^{-3} \text{ m}$ $m = iA = i \pi r^2$ $= 5 \pi \times 10^{-6} \text{ A-m}^2$ $= 1.57 \times 10^{-5} \text{ A-m}^2$	Evaluation of radius of loop	1 mark	Evaluation of magnetic moment	1 mark	 1/2 1/2 1/2 1/2	2				
Evaluation of radius of loop	1 mark										
Evaluation of magnetic moment	1 mark										
23	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 70%;">V-I characteristics</td> <td style="width: 30%; text-align: right;">1</td> </tr> <tr> <td>Explanation for voltage independence of reverse current</td> <td style="text-align: right;">1</td> </tr> </table>  <p>Since reverse current is due to flow of minority charge carriers across the junction, it is limited due to the concentration of minority carriers on either side of the junction. It is therefore independent of the voltage applied.</p>	V-I characteristics	1	Explanation for voltage independence of reverse current	1	 1 1	2				
V-I characteristics	1										
Explanation for voltage independence of reverse current	1										
24	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 70%;">Definition of mobility or formula</td> <td style="width: 30%; text-align: right;">1</td> </tr> <tr> <td>Derivation of relationship</td> <td style="text-align: right;">1</td> </tr> </table> Mobility is defined as the magnitude of drift velocity per unit electric field. $\mu = \frac{ \vec{V}_d }{E}$ <p>[Even if a student writes only the mathematical relation award 1/2 mark]</p> <p>Given $V_d = \frac{e\tau E}{m}$</p> <p>Hence, $\mu = \frac{V_d}{E} = \frac{e\tau}{m}$</p> <p style="text-align: center;">OR</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 70%;">Definition of drift velocity</td> <td style="width: 30%; text-align: right;">1</td> </tr> <tr> <td>Relation between current density and drift velocity</td> <td style="text-align: right;">1</td> </tr> </table>	Definition of mobility or formula	1	Derivation of relationship	1	Definition of drift velocity	1	Relation between current density and drift velocity	1	 1 1/2 1/2	2
Definition of mobility or formula	1										
Derivation of relationship	1										
Definition of drift velocity	1										
Relation between current density and drift velocity	1										

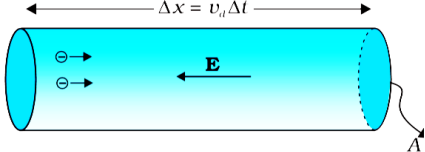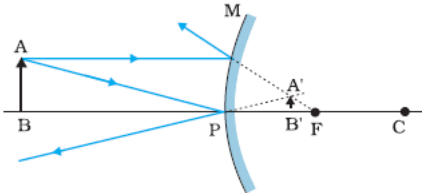	<p>The average speed with which electrons move when an electric field or potential difference is applied is called drift velocity.</p> $\vec{V}_d = \frac{-e\vec{E}\tau}{m}$ <p>[Award 1/2mark if student writes the formulae]</p>  <p>The amount of charge crossing the area A in time Δt</p> $I\Delta t = ne A \vec{V}_d \Delta t$ <p>Hence current density</p> $j = \frac{I}{A} = ne V_d$	1	
25	<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> <p>a) Position of object 1 mark</p> <p>b) Nature of image ½ mark</p> <p>c) Ray diagram ½ mark</p> </div> <p>a) $m = \frac{-v}{u}$ or $\frac{1}{2} = \frac{-v}{u}$ or $v = \frac{-u}{2}$</p> <p>Mirror formula</p> $\frac{1}{v} + \frac{1}{u} = \frac{1}{f}$ $\frac{-2}{u} + \frac{1}{u} = \frac{1}{15}$ $\frac{-1}{u} = \frac{1}{15}$ $u = -15 \text{ cm}$ <p>b) Nature of image: virtual , erect and diminished.</p> <p>c)</p> 	½	2
26.	<div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 10px auto;"> <p>a) SI unit of activity 1 mark</p> <p>b) Determination of half life 1 mark</p> </div> <p>a) SI unit of activity is becquerel</p>	1	


	<p>(Alternatively: 1 disintegration/ sec or decay/second)</p> <p>b) Activity falls to $1/8 = (1/2)^3$ Number of half lives = 3</p> <p>(Alternatively , $\frac{R}{R_0} = \left(\frac{1}{2}\right)^n$ $\frac{1}{8} = \left(\frac{1}{2}\right)^3$ or $n = 3$ half lives) $3 T_{1/2} = 15$ years $\Rightarrow T_{1/2} = 5$ years</p>	$\frac{1}{2}$							
27	<table border="1"> <tr> <td>(a) Sharpness of resonance</td> <td>1</td> </tr> <tr> <td>(b) Value of power factor</td> <td>1</td> </tr> </table> <p>(a) Sharpness of resonance is the sharpness of the peak of the resonance curve / a graph between I_m and ω. The sharper or narrower the curve the narrower is the resonance or the resonance lasts over a very small range of frequencies / Q factor or quality factor is the measure of sharpness of curve.</p> <p>(b) $Z = R$ Hence Power factor $\cos \phi = \frac{R}{Z}$ $\cos \phi = 1$</p> <p>Even if a student just writes power factor is 1, award full 1 mark</p>	(a) Sharpness of resonance	1	(b) Value of power factor	1	1	2		
(a) Sharpness of resonance	1								
(b) Value of power factor	1								
SECTION C									
28	<table border="1"> <tr> <td>a) Charge</td> <td>1 mark</td> </tr> <tr> <td>b) Potential difference</td> <td>1 mark</td> </tr> <tr> <td>c) Energy</td> <td>1 mark</td> </tr> </table> <p>a) $q = CV = 48 \times 10^{-6}$ coulomb Charge remains same or no change</p> <p>b) Initial potential difference $V_0 = 12$ volt After battery is removed $V = \frac{V_0}{K} = \frac{12}{8} = 1.5$ volt Decrease in potential difference = $12 - 1.5 = 10.5$ V</p> <p>c) Energy stored initially $U_0 = \frac{1}{2} C_0 V_0^2 = \frac{1}{2} \times 4 \times 10^{-6} \times 12 \times 12 = 288 \times 10^{-6} \text{ J}$ Final $U = \frac{1}{2} CV^2 = \frac{1}{2} KC_0 \frac{V_0^2}{K^2}$ $\frac{1}{2} C_0 \frac{V_0^2}{K} = \frac{1}{2} \times \frac{4 \times 10^{-6} \times 12 \times 12}{8}$ $U = 36 \times 10^{-6}$ Joules Energy reduces by $(288-36) \times 10^{-6} \text{ J} = 252 \times 10^{-6} \text{ J}$</p> <p>Note: (b) Even if a student writes, voltage becomes $\frac{1}{8}$ award full one mark.</p>	a) Charge	1 mark	b) Potential difference	1 mark	c) Energy	1 mark	$\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$ $\frac{1}{2}$	3
a) Charge	1 mark								
b) Potential difference	1 mark								
c) Energy	1 mark								

(c) Even if a student, without evaluating U_0 and U , writes U becomes $\frac{1}{K}$, award $\frac{1}{2}$ mark; and award $\frac{1}{2}$ mark for the correct formulae for U and U_0

OR

a) Net dipole moment	$1\frac{1}{2}$ marks
b) Magnitude of torque	1 mark
Direction of torque	$\frac{1}{2}$ mark

a) Diagram

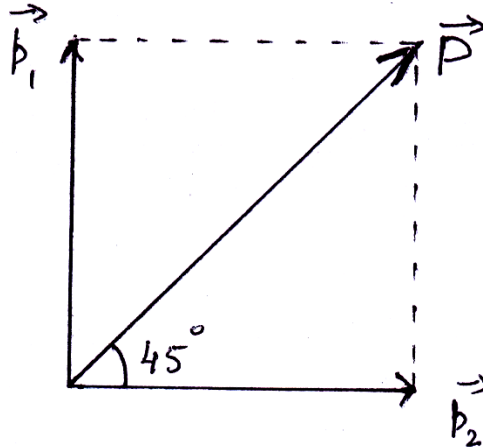

$$p_1 = p_2 = p$$

$$P = \sqrt{p^2 + p^2}$$

$$= \sqrt{2} p$$

Making 45° with $p_1 = p_2$

[Alternatively: Direction $\theta = \tan^{-1}(p/p) = \tan^{-1}(1) = \pi/4$]

b) Net torque $\Gamma = PE \sin \theta$

$$= \sqrt{2} pE \sin \pi/4$$

$$= pE$$

Direction: along negative z axis.

$\frac{1}{2}$

$\frac{1}{2}$

$\frac{1}{2}$

$\frac{1}{2}$

$\frac{1}{2}$

$\frac{1}{2}$

3

29

Differences in construction	1 mark
Determination of position of object	2 marks

Aperture of telescope objective lens is large whereas aperture of microscope objective is small

$f_o > f_e$ in telescope
 $f_o < f_e$ in microscope]

[Alternatively, focal length of telescope objective is large whereas focal length of microscope objective is very small]

[Award full 1 mark even if a student writes only one difference]

$$m = m_o \times m_e$$


$$m_e = 1 + \frac{D}{f_e} = 1 + \frac{25}{5} = 6$$


$\frac{1}{2}$


$\frac{1}{2}$

$\frac{1}{2}$

$\frac{1}{2}$

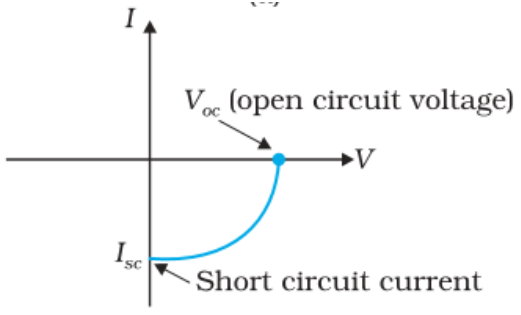	$\therefore m_o = \frac{30}{6} = -5$ $m_o = \frac{v}{u} = -5$ $v = -5u$ $\frac{1}{f} = \frac{1}{v} - \frac{1}{u}$ $\frac{1}{1.25} = \frac{1}{5u_o} + \frac{1}{u_o} \quad ; u = -u_o$ $u_o = \frac{6}{5} \times 1.25 = 1.5\text{cm}$ <p>[Alternatively,</p> $m_o = \frac{v}{u} = \frac{f_o}{f_o + u_o}$ $-5 = \frac{1.25}{1.25 + u_o}$ $-7.5 = 5u_o$ <p>$u_o = -1.5\text{cm}$ (for last ½ mark)]</p>	<p>½</p> <p>½</p> <p>3</p>							
30	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">Function of solar cell</td> <td style="text-align: right; padding: 5px;">1 mark</td> </tr> <tr> <td style="padding: 5px;">Working of solar cell</td> <td style="text-align: right; padding: 5px;">1 ½ mark</td> </tr> <tr> <td style="padding: 5px;">IV characteristics</td> <td style="text-align: right; padding: 5px;">½ mark</td> </tr> </table> <p>Solar cell is a device which converts solar energy into electrical energy. [Alternatively, when solar radiation falls on a solar cell, it generates emf.]</p> <p><u>Working</u> When solar radiation falls on a solar cell three important phenomena occur</p> <ol style="list-style-type: none"> 1) Generation: e-h pair generation near the depletion region 2) Separation: e-h will separate due to the electric field in depletion region 3) Collection- electrons are collected by front contact on n side and holes are collected by back contact on p side. <p>Thus, a potential difference will be created.</p> 	Function of solar cell	1 mark	Working of solar cell	1 ½ mark	IV characteristics	½ mark	<p>1</p> <p>½</p> <p>½</p> <p>½</p> <p>½</p>	3
Function of solar cell	1 mark								
Working of solar cell	1 ½ mark								
IV characteristics	½ mark								
31	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">Deduction of expression for threshold wavelength</td> <td style="text-align: right; padding: 5px;">2 marks</td> </tr> <tr> <td style="padding: 5px;">Deduction of expression for work function</td> <td style="text-align: right; padding: 5px;">1 mark</td> </tr> </table> $K_{\text{max}} = \frac{hc}{\lambda_1} - \phi_o = hc \left(\frac{1}{\lambda_1} - \frac{1}{\lambda_o} \right)$	Deduction of expression for threshold wavelength	2 marks	Deduction of expression for work function	1 mark	½			
Deduction of expression for threshold wavelength	2 marks								
Deduction of expression for work function	1 mark								

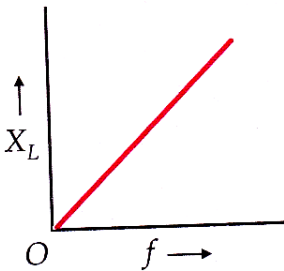	<p>when $\lambda = \lambda_2$</p> $2K_{\max} = hc \left(\frac{1}{\lambda_2} - \frac{1}{\lambda_0} \right)$ $\frac{K_{\max}}{2K_{\max}} = \frac{1}{2} = \frac{\left(\frac{1}{\lambda_1} - \frac{1}{\lambda_0} \right)}{\left(\frac{1}{\lambda_2} - \frac{1}{\lambda_0} \right)}$ $\lambda_0 = \frac{\lambda_1 \lambda_2}{2\lambda_2 - \lambda_1} = \text{Threshold wavelength}$ $\phi_0 = \frac{hc}{\lambda_0} = \frac{hc(2\lambda_2 - \lambda_1)}{(\lambda_1 \lambda_2)}$	<p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1</p>	<p>3</p>						
<p>32</p>	<table border="1" data-bbox="225 663 1074 775"> <tbody> <tr> <td>(a) Capacitance of the capacitor</td> <td>1</td> </tr> <tr> <td>(b) Value of induction</td> <td>1</td> </tr> <tr> <td>(c) Graph</td> <td>1</td> </tr> </tbody> </table> <p>(a) From graph $X_c = 6 \Omega$ at $\nu = 100 \text{ Hz}$</p> $X_c = \frac{1}{\omega C} = \frac{1}{2\pi\nu C}$ $C = \frac{1}{2\pi\nu X_c} = \frac{1}{2\pi \times 600}$ $C = \frac{1}{1200\pi} = 0.265 \text{ mF} = 0.265 \times 10^{-3} \text{ f}$ <p>[Even if a student evaluates part(a) correctly using] [any other point on the graph, award full 1 mark.]</p> <p>(b)</p> $X_c = X_L = \omega L = 6 \text{ at } 100 \text{ Hz}$ $L = \frac{6}{2\pi\nu}$ $= \frac{6}{2\pi \times 100} = 0.955 \times 10^{-2} \text{ H}$ <p>(c)</p> 	(a) Capacitance of the capacitor	1	(b) Value of induction	1	(c) Graph	1	<p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1</p>	<p>3</p>
(a) Capacitance of the capacitor	1								
(b) Value of induction	1								
(c) Graph	1								
<p>33</p>	<table border="1" data-bbox="225 1816 922 1939"> <tbody> <tr> <td>a) Graph of r_n vs n</td> <td>1 mark</td> </tr> <tr> <td>b) Ratio of time periods</td> <td>2 marks</td> </tr> </tbody> </table> <p>a)</p>	a) Graph of r_n vs n	1 mark	b) Ratio of time periods	2 marks				
a) Graph of r_n vs n	1 mark								
b) Ratio of time periods	2 marks								

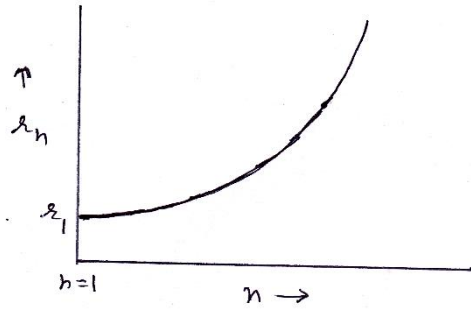

b) $r_n \propto n^2$
 $v_n \propto \frac{1}{n}$

$$T_n = \frac{2\pi r_n}{v_n} \propto n^3$$

$$\frac{T_2}{T_3} = \frac{8}{27}$$

1

1/2

1/2

1/2


1/2

3

34

(a) Derivation of balance condition	2
(b) Circuit diagram	1

(a)

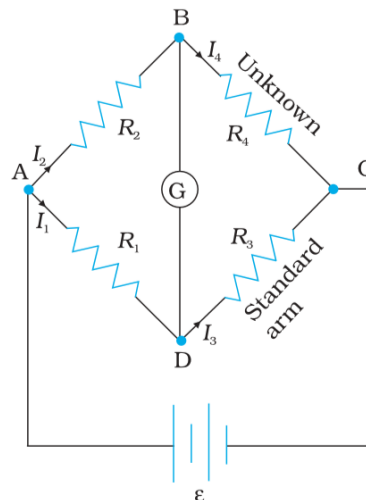

In a balanced Wheatstone bridge $I_g = 0$

$$\therefore I_1 = I_3 \quad \text{and} \quad I_2 = I_4$$

Applying loop rule in ADBA

$$\begin{aligned} -I_1 R_1 + 0 + I_2 R_2 &= 0 \\ \Rightarrow \frac{I_1}{I_2} &= \frac{R_2}{R_1} \quad \text{(i)} \end{aligned}$$

And in loop CBDC

$$\begin{aligned} I_2 R_4 + 0 - I_1 R_3 &= 0 \\ \Rightarrow \frac{I_1}{I_2} &= \frac{R_4}{R_3} \quad \text{(ii)} \end{aligned}$$

From (i) and (ii)

$$\frac{R_2}{R_1} = \frac{R_4}{R_3}$$

Condition for balanced Wheatstone bridge


1/2

1/2

1/2

1/2

(b)

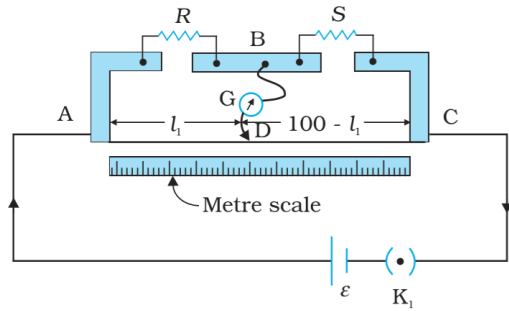

1



3

SECTION D

35

(a) Derivation of the lens maker's formula	2½
(b) Ray diagram	1
(c) Focal length of the mirror	1½

(a)

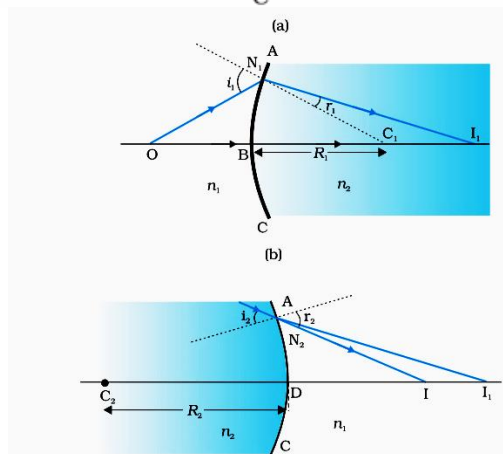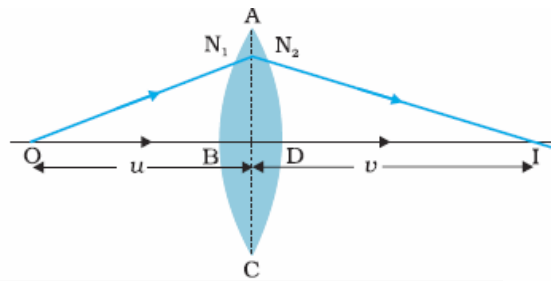

½

½

For first refracting surface

$$\frac{\mu_2}{v_1} - \frac{\mu_1}{u} = \frac{\mu_2 - \mu_1}{R_1} \text{-----1}$$

For second refracting surface ADC

$$\frac{\mu_1}{v} - \frac{\mu_2}{v_1} = \frac{\mu_1 - \mu_2}{R_2} \text{-----2}$$

Adding equations 1 and 2, we get


$$\begin{aligned} \frac{\mu_1}{v} - \frac{\mu_1}{u} &= (\mu_2 - \mu_1) \left[\frac{1}{R_1} - \frac{1}{R_2} \right] \\ \Rightarrow \frac{1}{v} - \frac{1}{u} &= \left(\frac{\mu_2}{\mu_1} - 1 \right) \left[\frac{1}{R_1} - \frac{1}{R_2} \right] \\ \therefore \frac{1}{v} - \frac{1}{u} &= \frac{1}{f} \\ \therefore \frac{1}{f} &= \left(\frac{\mu_2}{\mu_1} - 1 \right) \left[\frac{1}{R_1} - \frac{1}{R_2} \right] \end{aligned}$$

½

½

½

also
 $\frac{\mu_2}{\mu_1} = \mu$
 $\therefore \frac{1}{f} = (\mu - 1) \left[\frac{1}{R_1} - \frac{1}{R_2} \right]$

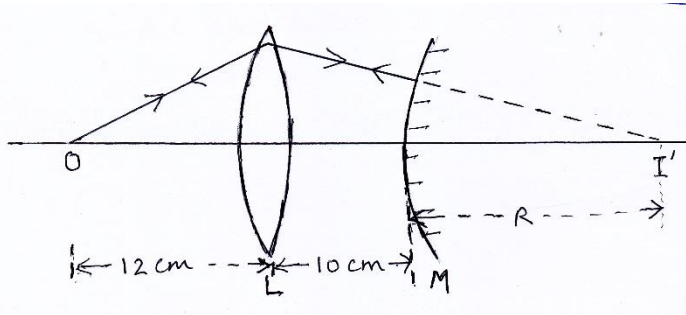

$f_1 = 10 \text{ cm}$

$u = -12 \text{ cm}$

Applying lens formula

$$\frac{1}{f} = \frac{1}{v} - \frac{1}{u}$$

$$\frac{1}{10} = \frac{1}{v} - \frac{1}{-12}$$

$\Rightarrow v = 60 \text{ cm}$

\therefore radius of curvature of the mirror

$R = 60 \text{ cm} - 10 \text{ cm} = 50 \text{ cm}$

hence focal length of the mirror $f_m = \frac{R}{2} = 25 \text{ cm}$

OR


(a) Definition of wavefront	1/2
Propagation of wavefront	1/2
Verification of law of refraction	2
(b) (i) Determination of width of the slit	1
(ii) Calculation of distance of secondary maxima	1

(a)

Wavefront is a surface of constant phase.

Alternatively, It is the locus of all those points which are in the same phase of disturbance.

The wave propagates in a direction perpendicular to the wavefront through secondary wavelets originating from different points on it.

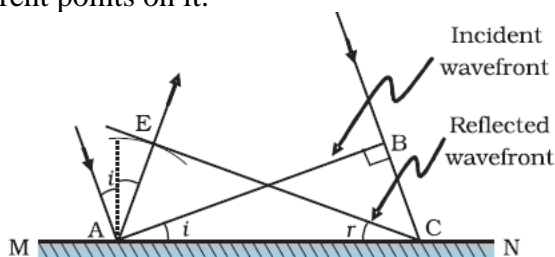

1

1/2

1/2


1/2


5

1/2

1/2

1/2


	<p>Consider a plane wave AB incident at an angle I with speed v on the surface MN in time τ Therefore</p> $BC = v \tau$ <p>Using Huygen's principle, a sphere of radius v τ which has tangent plane CE is reflected at an angle r</p> $\therefore AE = BC = v\tau$ <p>$\therefore \Delta EAC$ and ΔBAC are congruent $\therefore \angle i = \angle r$</p> <p>(b)</p> <p>(i)</p> $x = \frac{\lambda D}{d}$ $\Rightarrow d = \frac{\lambda D}{x} = \frac{500 \times 10^{-9} \times 1}{2.5 \times 10^{-3}} = 2 \times 10^{-4} \text{ m}$ <p>(ii) For the first Secondary maxima</p> $x = \frac{3\lambda D}{2d}$ $= \frac{3 \times 500 \times 10^{-9} \times 1}{2 \times 2 \times 10^{-4}} = 3.75 \text{ mm}$ <p>[Even if a student finds location of first secondary maxima by $(2.5) + (\frac{1}{2} \times 2.5) = 3.75 \text{ mm}$, award full 1 mark for b(ii)]</p>	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>5</p>							
36	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">(a) Expression for electric field outside a charged shell</td> <td style="text-align: right; padding: 5px;">2</td> </tr> <tr> <td style="padding: 5px;">Graph of E vs r</td> <td style="text-align: right; padding: 5px;">1</td> </tr> <tr> <td style="padding: 5px;">b) Location of point where field is zero</td> <td style="text-align: right; padding: 5px;">2</td> </tr> </table> <p>(a)</p>  <p style="text-align: center;">(a)</p> $\phi = \frac{q}{\epsilon_0}$ $E \times 4\pi r^2 = \frac{\sigma(4\pi R^2)}{\epsilon_0}$ $E = \frac{1}{4\pi\epsilon_0} \frac{q}{r^2}$ <p>$[\therefore q = \sigma(4\pi R^2)]$</p> <p>which is electric field due to a point charge q at a distance r from it</p>	(a) Expression for electric field outside a charged shell	2	Graph of E vs r	1	b) Location of point where field is zero	2	<p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>1</p>	
(a) Expression for electric field outside a charged shell	2								
Graph of E vs r	1								
b) Location of point where field is zero	2								

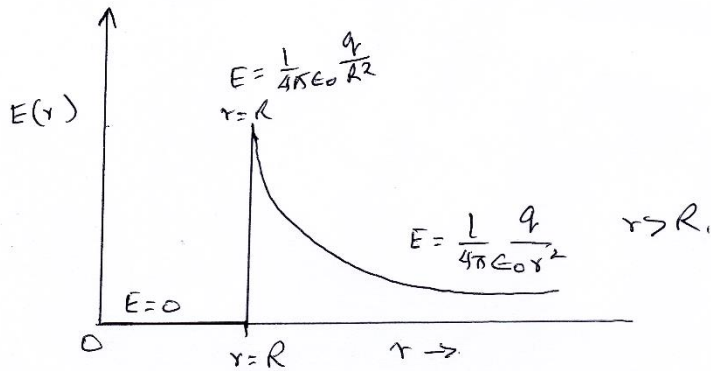

1/2

For $r < R$, $E = 0$ because $q = 0$ inside the shell

(b)



1/2

1/2

1/2

5

$$E_1 = E_2$$

$$\frac{1}{4\pi\epsilon_0} \frac{1 \times 10^{-6}}{x^2} = \frac{1}{4\pi\epsilon_0} \frac{4 \times 10^{-6}}{(0.3 - x)^2}$$

$$(0.3 - x)^2 = 4x^2$$

$$0.3 - x = 2x$$

$$x = 0.1 \text{ m} = 10 \text{ cm (to the right of } q_1)$$

OR

a) Work done in assembling the system	2
b) (i) Evaluation of electric field	1 1/2
(ii) Electric flux through the cube	1 1/2

1/2

1/2

1/2

(a)

The work done in bringing charge q_1 from infinity to r_1 is

$$W_1 = q_1 V_1$$

The work done in bringing charge q_2 from infinity to r_2 is

$$W_2 = q_2 V_2$$

Work done in moving q_2 against the field due to q_1

$$W_3 = \frac{1}{4\pi\epsilon_0} \frac{q_1 q_2}{r}$$

Hence total work done is $W = W_1 + W_2 + W_3$

$$W = q_1 V_1 + q_2 V_2 + \frac{1}{4\pi\epsilon_0} \frac{q_1 q_2}{r}$$

[V_1 and V_2 are potentials at the two points in the electric field]

(b)

(i)


$$E = -\frac{dV}{dx} = -\frac{d}{dx}(10x + 5)$$


$$\therefore \vec{E} = -10\hat{i} \text{ N/C}$$

1/2

1/2

5

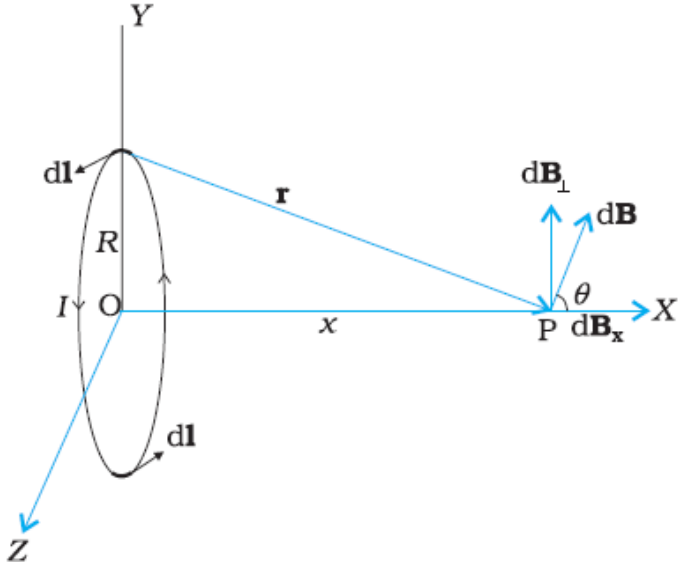	<p>(ii) Electric flux through the cube, ϕ =sum of electric flux through 6 faces Electric flux through faces perpendicular Y and Z axis = 0 $\because E$ is along x axis Electric flux through faces perpendicular to x axis $= \phi_1 + \phi_2$ $= 10 \times (0.2)^2 - 10 \times (0.2)^2$ $= 0$</p>		
37	<div style="border: 1px solid black; padding: 5px; margin-bottom: 10px;"> <p>(a) Magnetic field at a point on the axis of the current loop 3 (b) Magnitude and direction of the magnetic force 2</p> </div> <p>(a)</p>  <p>$dB = \frac{\mu_0 Idl}{4\pi(x^2 + R^2)}$</p> <p>$dB$ has two components dB_x and dB_{\perp}, perpendicular components from diametrically opposite elements dl cancel out, thus only dB_x components remain effective</p> <p>$dB_x = dB \cos\theta$</p> <p>and $\cos\theta = \frac{R}{(x^2 + R^2)^{\frac{1}{2}}}$</p> <p>$\therefore B = \int dB_x$</p> <p>$= \int_0^{2\pi R} \frac{\mu_0 IdlR}{4\pi(x^2 + R^2)^{\frac{3}{2}}}$</p> <p>$= \frac{\mu_0 IR^2}{2(x^2 + R^2)^{\frac{3}{2}}}$</p> <p style="text-align: center;">along the axis of the loop</p> <p>(b)</p> <p>(i)</p>	<p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">$\frac{1}{2}$</p> <p style="text-align: center;">1</p>	



$$\vec{F} = I[\vec{l} \times \vec{B}]$$

$$F = IlB \sin \theta$$



$$= 5 \times 2 \times 0.6 \times 10^{-4} \times 0.5 = 3 \times 10^{-4} \text{N}$$

(ii) Towards east

OR

(a) Derivation of torque	2
Reason of radial magnetic field	1
(b) Kinetic Energy of the particle	2

(a)

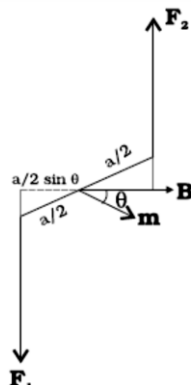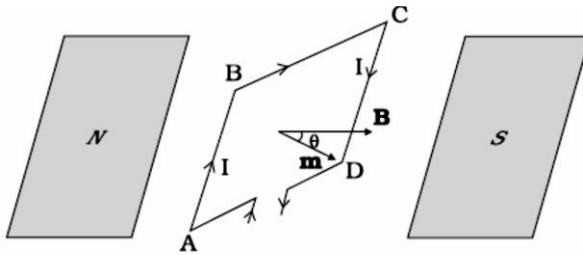

Arms AD and BC experience no net force whereas arm AB and CD experience forces which constitute torque

$$F_1 = F_2 = IbB$$

Therefore magnitude of torque

$$\tau = \left(F_1 \frac{a}{2} + F_2 \frac{a}{2} \right) \sin \theta$$

$$\tau = I(ab) \sin \theta$$

where $ab = A(\text{area of the loop})$

1/2

1/2

1/2

1/2

5

1/2

1/2

1/2

1/2

	<p>$\Rightarrow \tau = IAB \sin \theta$</p> <p>for N number of turns</p> <p>$\tau = NIAB \sin \theta$</p> <p>$\tau = \vec{M} \times \vec{B}$</p> <p>Where magnetic moment $M=NIa$</p> <p>Galvanometer has Radial magnetic field to increase the field strength and to make torque independent of orientation θ/ it maximise the torque</p> <p>(b)</p> <p>The kinetic energy $KE = \frac{1}{2} \frac{q^2 B^2 R^2}{m}$</p> $= \frac{1}{2} \times \frac{(1.6 \times 10^{-19})^2 \times (0.4)^2 \times (0.4)^2}{1.6 \times 10^{-27}} \text{ J}$ $= \frac{(1.6 \times 10^{-19})^2 \times (0.4)^2 \times (0.4)^2}{2 \times 1.6 \times 10^{-27} \times 1.6 \times 10^{-19}} \text{ eV}$ <p>$= 1.28 \text{ MeV}$</p>	<p>1</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p> <p>$\frac{1}{2}$</p>	<p>5</p>
--	---	--	----------